


<b>BROADBAND RF FET</b> <b>N-CHANNEL FIELD EFFECT TRANSISTOR</b>	<b>CP643</b> <b>CRY643UB</b>
---	---------------------------------


- FOR HIGH DYNAMIC RANGE R.F. AMPLIFIERS
- SPECIFIED FOR H.F. BAND – USEABLE THRU 500 MHz
- LOW NOISE FIGURE DIRECT FROM 50 Ohm LINE<sup>2</sup>

**GEOMETRY 446**




.021" X .024"

**PACKAGE STYLES**



**ELECTRICAL DATA**      **ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL		UNITS
Drain to Source Voltage	$BV_{DSO}$	30	Volts
Drain to Gate Voltage	$BV_{DGO}$	30	Volts
Gate to Source Voltage	$BV_{GSO}$	-15	Volts
Peak Drain Current	$I_D$	0.3	Amps
Power Dissipation 25°C CASE	$P_D$	2.0	Watts
Derating Factor (slope)	DF	87	°C/W
Junction Temp. (Oper. & Store)	$T_J$	-55°C to +200°C	

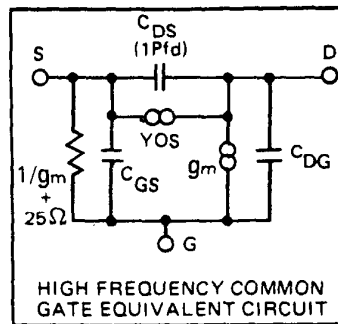

**TYPICAL CHARACTERISTICS IN CIRCUIT OF TMF 18**



Dynamic Range      140 dB  
 Two Tone      @ 3 MHz/5MHz  
 3rd Order Prod.

Signal Level	Typ. 3rd Order Product
0.25 Volt (0dBm)	- 58dB

**ELECTRICAL CHARACTERISTICS:  $T_{CASE} = 25^\circ C$  (UNLESS OTHERWISE STATED)**

PARAMETERS AND CONDITIONS	SYMBOL	CP 643			UNITS
		Min.	Typ.	Max.	
Gate Leakage Current $V_{GS} = -15V, V_{DS} = 0$	$I_{GSS}$	-	1.0	10	nA
Gate Leakage Current $V_{GS} = -15V, V_{DS} = 0, T_C = 125^\circ C$	$I_{GSS}$	-	-	10	$\mu A$
Transconductance $V_{DS} = 15V, I_{DS} = 25 mA$	$g_m$	20	25	30	mMhos
Pinch-Off Voltage $V_{DS} = 5V, I_{DS} = 1.0 mA$	$V_{PO}$	2.0	4.0	7.0	Volts
Gain in Ckt. of TMF18 $I_{DS} = 25 mA, f = 1$ to 100 MHz.	A	8.0	9.0	10.0	dB
Gate to Source Cap. $V_{GS} = -20V$	$C_{GS}$	-	5	6	pf
Gate to Drain Cap. $V_{GD} = -20V$	$C_{GD}$	-	5	6	pf
Drain Current <sup>1</sup> $V_{DS} = 15V, V_{GS} = 0$	$I_{DSS}$	50	100	250	mAmps
TMF18 <sup>2</sup> $I_{DS} = 25 mA, f = 1 MHz.$	N.F.	-	4.0	5.0	dB

**JUNCTION CAPACITANCE VS. VOLTAGE**

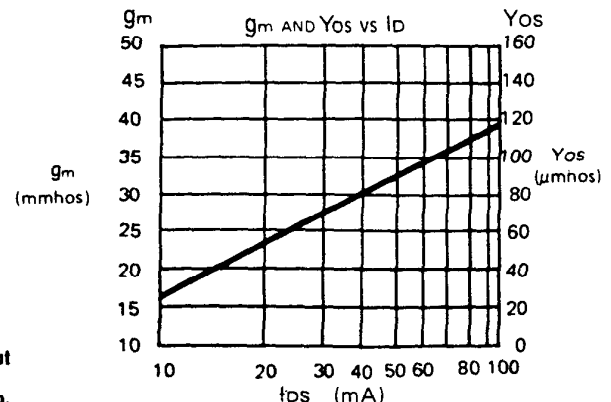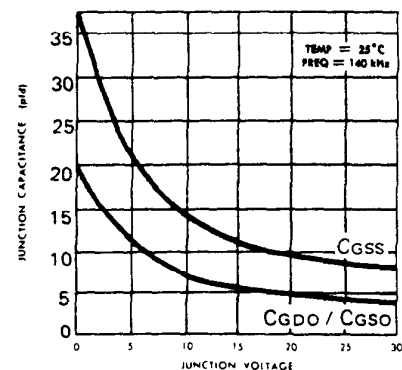

<sup>1</sup>Pulse Measurement 1% Duty Cycle 10 ms Max.

<sup>2</sup>The noise figure will be improved at the cost of gain when used in a 75Ω line with a 2:1 output winding ratio or in a 50Ω line with an input step up transformer.

<sup>3</sup>The gain may be raised at a sacrifice in bandwidth by increasing the output transformer ratio.